



Micro Blower

LS-9250 Micro Blower


AL impeller and Plastic casing (UL and ISO10993)
 All air-contacting parts are respiratory-physiologically harmless

Power supply :>24V-10A ,
 >12V-16A
 48VDC and 220VAC are available



Dimensions 92*92*65mm

No.	Wires	Code
1	白 white	U
2	蓝 Blue	V
3	黄 Yellow	W
4	黑 Black	GND
5	灰 Gray	Ha
6	绿 Green	Hb
7	橙 Orange	Hc
8	红 Red	+5V

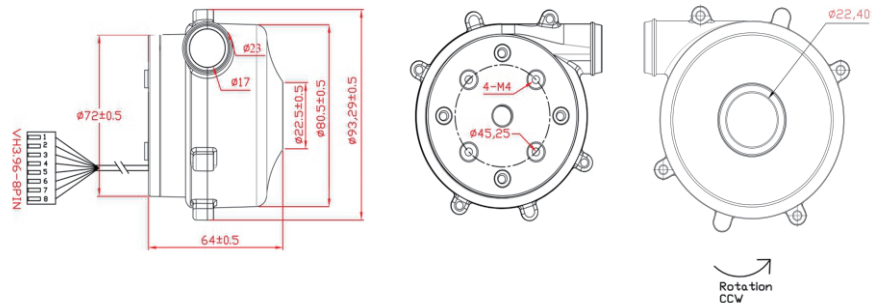

Micro Blower Main Parameters

Model+Normal Voltage	Flow	Pressure	Current	speed	Voltage range	Power	Resistance	Inductance	Rotor inertia
	l/min	kpa	A	rpm	V	P	mΩ	uH	gcm2
LS9250-12V	520	8	14.3	25000	7.8 - 14.8	162	95	20-22	22.25
LS9250-24V	580	9	8.3	27000	7.8 - 30	200	195	65-68	22.25

Model+Normal Voltage	Noise	MTBF	Using Temp	Weight	Hall Angle	Pole pair	Connection	IP Class	Controller version
	dB	Hour	°C	g					
LS9250-12V	48	20000	-20 TO 85	320	120	4P=2	Y	IP54	LS7652-12V-250W
LS9250-24V									LS7652-24V-250W

Flow & Pressure Curves

