




AC GEAR MOTOR

28mm Shaft 0.4-1.5KW

卧式/horizontal 立式/vertical
 单相/三相/1-phase/3-phase

HOW TO ORDER

GV - 28 - 750 - 30 - S - B

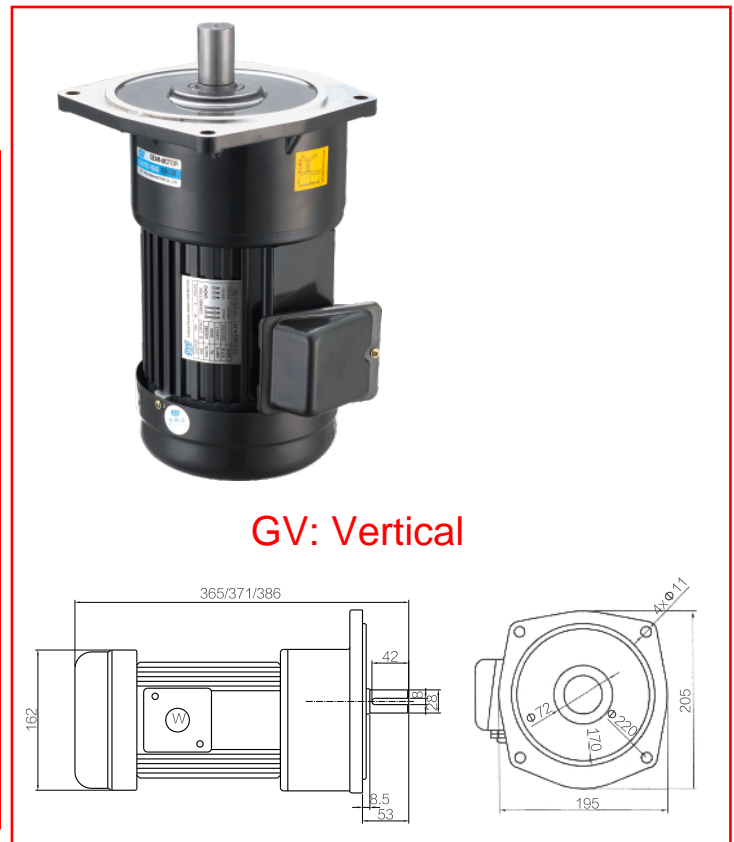

容许转矩 Allowable Torque 单位: N.m

| 公称速比 Normal speed ratio | 0.4KW | | 0.75KW | | 1.1KW | | 1.5KW | |
|----------------------------|---------------------|-------|---------------------|-------|---------------------|-------|---------------------|--------|
| | 50HZ | 60HZ | 50HZ | 60HZ | 50HZ | 60HZ | 50HZ | 60HZ |
| | M ₂ (Nm) | | M ₂ (Nm) | | M ₂ (Nm) | | M ₂ (Nm) | |
| 3 | 7.6 | 6.5 | 14.0 | 11.9 | 20.8 | 17.8 | 28.1 | 23.8 |
| 5 | 13.0 | 10.8 | 23.8 | 20.5 | 35.6 | 29.7 | 48.6 | 41.0 |
| 7.5 | 18.8 | 16.3 | 34.8 | 29.8 | 51.8 | 44.5 | 70.3 | 59.5 |
| 10 | 25.9 | 21.6 | 48.6 | 41.0 | 71.3 | 59.4 | 98.3 | 82.1 |
| 13.5 | 33.8 | 29.3 | 62.6 | 53.6 | 93.2 | 80.1 | 126.5 | 107.1 |
| 15 | 38.9 | 32.4 | 73.4 | 61.6 | 106.9 | 89.1 | 145.8 | 122.0 |
| 20 | 51.8 | 43.2 | 97.2 | 81.0 | 142.6 | 118.8 | 195.5 | 163.1 |
| 25 | 64.8 | 54.0 | 121.0 | 101.5 | 178.2 | 148.5 | 244.1 | 204.1 |
| 30 | 78.8 | 64.8 | 145.8 | 122.0 | 216.8 | 178.2 | 292.7 | 244.1 |
| 35 | 90.7 | 75.6 | 169.4 | 142.1 | 249.5 | 207.9 | 341.7 | 285.7 |
| 40 | 100.4 | 84.2 | 189.0 | 157.7 | 276.2 | 231.7 | 376.9 | 314.3 |
| 50 | 125.3 | 104.8 | 236.5 | 197.6 | 344.5 | 288.1 | 470.9 | 393.1 |
| 60 | 150.1 | 125.3 | 283.0 | 236.5 | 412.8 | 344.5 | 565.9 | 472.0 |
| 75 | 187.8 | 157.2 | 354.8 | 296.4 | 516.8 | 432.2 | 706.4 | 589.7 |
| 90 | 223.6 | 186.8 | 424.4 | 354.2 | 614.8 | 513.8 | 832.7 | 694.4 |
| 100 | 248.4 | 207.4 | 466.6 | 388.8 | 683.1 | 570.2 | 904.0 | 753.8 |
| 120 | 299.2 | 249.5 | 559.4 | 466.6 | 822.7 | 686.1 | 1091 | 904.0 |
| 150 | 368.8 | 307.8 | 689.6 | 575.1 | 1014.3 | 846.5 | 1339.2 | 1116.7 |

- 转速是基于电机同步转速 (50Hz:1500r/min、60Hz:1800r/min),额定负载时, 实际转速为表列转速的80%~98%。
- Spend figures are based on sychronous speed(50Hz:1500r/min、60Hz:1800r/min) the actual output speed under rated torque conditions,is about2~20% less than synchronous speed.