



LS7095 Micro Blower



塑料尼龙叶轮+塑料尼龙机壳+铝制机身 Plastic impeller and casing+AL mental motor casing (UL and ISO10993)


与空气接触的部件均对呼吸生理无害 All air-contacting parts are respiratory-physiologically harmless

供电电源: 24V-15以上
220VAC版本在生产

Power supply : >24V-15A
220VAC are available

外观尺寸86*82*105mm Dimensions 86*82*105mm

端子顺序 Connector No.	1	2	3
线材颜色 Wires colour	白 White	蓝 Blue	黄 Yellow
线材含义 Meaning	U	V	W

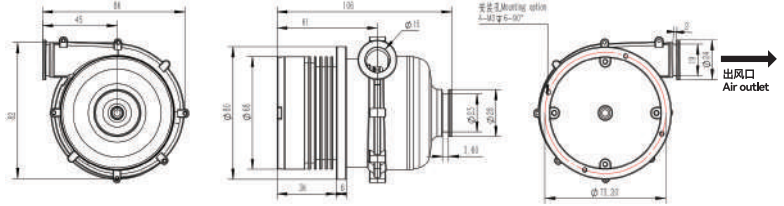

微型鼓风机核心参数 Micro Blower Main Parameters

型号+额定电压 Model+Normal Voltage	最大风量 V= max	最大风压 Δp= max	电流	转速	电压范围	功率	端电阻	电感范围	转子惯量
	Flow	Pressure	Current	speed	Voltage range	Power	Resistance	Inductance	Rotor inertia
	l/min	kpa	A	rpm	V	W	mΩ	uH	gcm2
LS-7095-24V	680	23	12	38500	7.8 - 30	288	51.5	165-170	8.73
LS-7095-220VAC	680	23	1.182	38500	200-240	270	5380	24-26	

型号+额定电压 Model+Normal Voltage	噪音值	使用寿命	温度承受范围	重量	霍尔角度	转子极对数	绕组接法	IP等级	外置驱动器型号
	Noise	MTBF	Using Temp	Weight	Hall Angle	Pole pair	Connection	IP Class	Controller version
	dB(1m-1kpa)	Hour	°C	g					
LS-7095-24V	45	22000	-20 TO 50	570	/	2P=1	△	IP50	24V-350W-W
Y							220VAC-400W-W		

24V、220VAC-P&Q曲线和流量&功率&转速曲线 24V、220VAC P&Q curve and Flow&Power&Speed curve

